#### STANDALONE FDi MANAGEMENT

Standard K-PAD

Protect+ K-PAD

Wireless K-PAD

TRANSIT+	Part Number		Readers - 2SMART 13.56Mh	
Transit+ controller	FD-105-001	<u>►</u>	Mullion reader	
			P40 mullion reader*	
RF Receivers			P60 black reader	
2 wire RF receiver 433Mhz 2 wire RF receiver 868Mhz	FD-020-190 FD-020-191	FDI ar m	P80 mullion reader*	
Easy Door receiver 868Mhz	GB-150-009	FOI \$105,8000s	Mushroom reader	
			40x40 panel mount reader	
			Urmet Sinthesi S2 reader	
K-PAD			Urmet Sinthesi Steel reader	

GB-060-118

GB-060-218

GB-060-318

Mullion reader	FD-020-208	FOL
P40 mullion reader*	FD-020-220	Ē
P60 black reader	FD-020-209	( R
P80 mullion reader*	FD-020-221	
Mushroom reader	FD-020-175	1
40x40 panel mount reader	FD-020-007	
Urmet Sinthesi S2 reader	FD-020-176	X
Urmet Sinthesi Steel reader	FD-020-132	$\times$
Elekta Steel reader	FD-020-166	
Elekta glass reader	FD-020-210	O O
Alpha reader*	FD-020-227	

Part Number

### Keys fobs transmitters

GB-010-010	
GB-010-200	
FD-010-203	#
FD-010-204	
	GB-010-200 FD-010-203







FDI MATELEC
Route de Saint Symphorien
85130 LES LANDES GENUSSON France Tel: +33 2 51 61 69 69











## TRANSIT+

## FD-105-001

The Transit + Controller is an advanced access controller designed by FDI. Doors and credentials are set-up via an App and a Bluetooth connection.




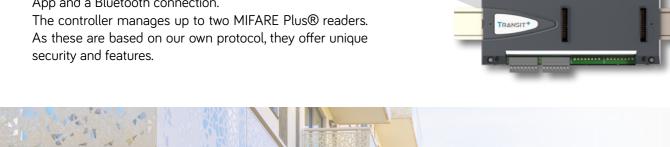









Available in 2020







- 2 reader ports
- Easy fob enrolment via NFC smartphone feature and App
- Secure Bluetooth® communication
- FDI MIFARE Plus® readers for enhanced security
- Upgradable firmware via the App
- Designed for wall mount or standard DIN Rail mounting





TRANSIT+





# K-PAD

Especially designed for automation (alarms, gates...), our surface mount K-PAD are meant for any type of project for the control of one or 2 doors. Their IP rating of IP 65 is perfectly adapted to outdoor fitting. The KPAD range is available in wired version or in wireless version with remote electronics. A zamak housing (ultra-resistant material against vandalism) is also available.























- Dimensions: 120 x 83 x 36 mm
- 100 user codes
- Codes from 3 to 8 digits
- Buzzer
- Programming by master code
- keypad with blue backlights
- Tamper
- Operating temperature: -20° à +60°
- IP65 rated